


CLRP FILTER CARTRIDGE WITH POLYAMIDE NET



The CLRP Filter cartridge with a polyamide is designed to protect boilers, washing machines, to filter sand, scale, rust.

Versatile industrial use includes protecting water pumps, boilers, irrigation, cooling systems and car wash services treatment.

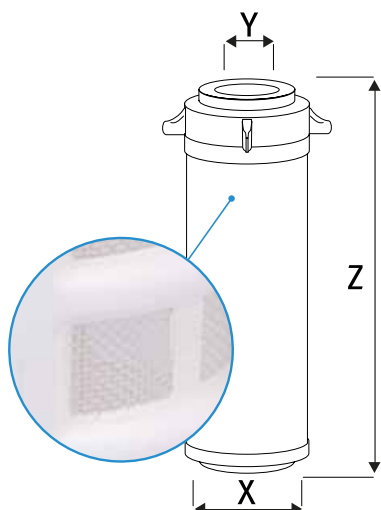

KEY FEATURES

- Uniform flow and low pressure drop due to cylindrical shape
- Easy to wash
- High pressure resistance thanks to the honeycomb structure
- Suitable for drinking water treatment
- Complies with DM25 standards (ITALY)
- Produced without any glue or sealant addition

made in 
ITALY

Model	CLRP
Filtration	Sediments
Filtering medium	Polyamide
External armouring	Polypropylene
O-ring	NBR 70 + Rubber
Connection	DOE
Working temperature	From 4°C (39°F) to 50°C (122°F)
Cartridge type	Washable
Maintenance	Quarterly
Duration	24 months

Code	Filtration rating, µ	Flow rate, l/h	Z	X	Y	Pieces in box
FCLRP00005	80	1 900	10.1 cm	2.7 cm	2.0 cm	15
FCLRP00010	150	2 200				
FCLRP00015	250	2 500				
FCLRP00020	400	2 500				